

Mode and function



Power		Press once to turn on or off.
Video light		Built in video light with 9 steps of output level adjustment.
Full Automatic Mode	A	Flash light is fully controlled by the camera for the most proper exposure.
TTL Program Mode	TTL	Flash light is automatically controlled by the camera but the flash exposure value can be compensated.
Manual Setting Mode	M	Selecting the desired manual power on the flash unit.
High-speed synchronization	H	Hold the button for 1 second to activate or deactivate High speed synchronization.
Mute		Hold the button for 1 second to activate or deactivate the Mute function.
Wireless Channel	Channel	Hold the button for 1 second to change wireless channel during wireless mode.
Manual zoom	M.ZOOM	Hold the button for 1 second to change zoom head position.
Lock		Hold the button for 1 second to lock or unlock all the buttons on the right side dial.
Pilot Button		Press once to test-flash Green: flash ready Red: flash recharging Yellow: Nissin Air System Pairing mode
Wireless TTL Slave Mode		Wireless NAS mode A: Group A B: Group B C: Group C Optical mode Sony: A: RMT TTL B: RMT2 TTL C: RMT M Canon, Nikon & Four Third: A: Group A B: Group B C: Group C (Optical mode not available for Fujifilm system) Optical mode will activate automatically when no NAS signal, or 6 seconds after disconnected from other NAS device.

S_F Slave Film

S_D Slave Digital


How to pair with Commander Air 1

- 1 **OFF**
Before the pairing begins, make sure your i60A and Air 1 are turned off.
- 2 **HOLD 3 Sec.**
Hold the **Power button** and **Lock button** on your i60A until you hear the beeping sound.
- 3 **HOLD 3 Sec.**
Hold the **S button** and **Power button** on your Air 1 until the **Pilot light** is flashing.
- 4 **DONE!**
After the pairing is done, the i60A and Air 1 will stop beeping and flashing.



Scan the code or go to the "Nissin Digital Global" youtube channel to watch the pairing guide.

Nomenclature

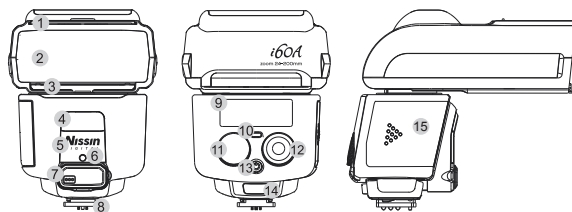

- | | |
|--------------------------------------|-------------------------------------|
| 1 Fill-in reflector | 9 Color monitor |
| 2 Flash head | 10 Pilot button (Test flash button) |
| 3 Light diffusing panel | 11 Mode dial |
| 4 Video light | 12 Control wheel and button |
| 5 Remote/ Slave sensor | 13 Power button |
| 6 AF-assist light | 14 Unlock button |
| 7 Battery pack adapter | 15 Battery compartment door |
| 8 Mounting foot and Hotshoe contacts | |

Accessories:



Soft box



Flash stand



Pouch